

## TECHNICAL DATA SHEET

### DOLPHIN Carb & Choke Cleaner

Revision Date : 01 April 2021


Revision No. 2

Number of Pages : 2

#### PRODUCT DESCRIPTION

**Dolphin Carb And Choke Cleaner** removes dirt, gum and varnish deposits surfaces of engine carburetors, heat valves, and automatic chokes. It Eliminates stalling and rough idling.

#### TECHNICAL PROPERTIS

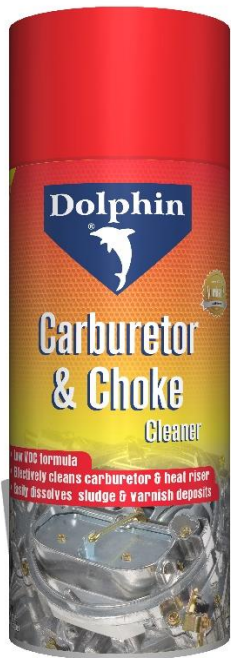

Properties	Specifications
Appearance	Clear Liquid
Density	0.83 g/cm <sup>3</sup>
Solubility in Water	Insoluble
VOC	106 g/L
Auto-Ignition Temp.	464 °C
Flash Point	<10 °C

Note:

\* Information on this data sheet is subject to change without prior notice and should not be used for writing specifications

#### KEY FEATURES

- Safe to use even on running engines.
- Product is free from lead, phosphorous, silicone, alcohol, chlorinated or fluorinated solvents.

#### TYPICAL APPLICATION

- Carburetors
- Manual and automatic chokes
- Linkages
- Heat Risers

<ul style="list-style-type: none"> <li>It does no harm to oxygen sensors, catalytic converters or fuel injection systems.</li> </ul>	<ul style="list-style-type: none"> <li>PCV Valves</li> <li>Exhaust Gas Recycling Valves (EGR)</li> </ul>
--	--

<b>DIRECTIONS FOR USE</b>	<ul style="list-style-type: none"> <li><b>Always hold the Can in an upright position during application.</b></li> <li><b>Remove cap and insert extension tube into spray tip.</b></li> </ul> <p><b>CARBURETOR:</b> Remove the air cleaner assembly and run the engine at fast idle. Spray the cleaner on linkages, bowls, chambers, floats, jets and setting screws. Deposits will dissolve and flush away.</p> <p><b>CHOKE:</b> While opening and closing choke by hand, spray both ends of the valve shaft. If the choke is not completely free after this procedure, remove choke cover and start the engine. With the engine running, spray cleaner in vacuum cylinder until choke operates freely.</p> <p><b>PCV VALVE:</b> After disconnecting valve hose, spray The Cleaner directly into the PCV valve. Start engine, run for one to two minutes then turn the engine off. Spray the cleaner into the valve one more time and reconnect the hose.</p> <p><b>HEAT VALVE:</b> Spray cleaner onto the open end of the valve shaft. After allowing spray to penetrate, move the valve up and down. Repeat until it moves freely.</p> <p><b>ADDITIONAL USE:</b> Dolphin Carburettor Cleaner reduces heat risers by dissolving build up around the shaft.</p>
<b>PACKAGING</b>	<b>Dolphin Carb And Choke Cleaner</b> is available in 450 ml metal aerosol can with 12 cans per case.
<b>STORAGE AND SHELF LIFE</b>	Store in a cool, dry location in unopened containers at temperature below 50°C. Do not place in direct sunlight or nearby any heat and flame source. Do not expose to temperature exceeding 50°C. A maximum of 6.7 ft. height should be kept of the pallet containing Spray paint cartons.  <b>Dolphin Carb And Choke Cleaner</b> has a shelf life of 36 months from date of manufacturing.
<b>HANDLING PRECAUTIONS</b>	Contents extremely flammable. Do not smoke while spraying. Do not use near open flames. Do not puncture or incinerate even after use. Exposure to high temperatures may cause can to burst. Keep away from all live electrical sources including battery terminals, electrical panels and other electrical components. For safe handling information, refer to the Material Safety Data Sheet of this product.

KEEP OUT OF REACH OF CHILDREN • KEEP CONTAINER TIGHTLY CLOSED • FOR INDUSTRIAL & PROFESSIONAL USE

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made. AMI reserves the right to change the properties of its products without notice